



VAF™ FILTRATION SYSTEMS V-2000H AUTOMATIC SCREEN FILTERS

GENERAL INFORMATION

The V-Series™ filter incorporates the latest self-cleaning screen filtration technology available today. The complexity and cleaning efficiency of any self-cleaning screen filter is in the mechanical system that drives the cleaning process. The patented+ V-Series filter's bi-directional drive mechanism is the simplest and most efficient design resulting in:

- fewer moving parts (no limit switches or pistons reversing the cleaning mechanism)
- simpler controls
- lowest flush flow
- greater cleaning efficiency
- lower maintenance requirements

The V-Series filter's 12 to 15 second flush cycle is automatically initiated when a pressure differential across the screen increases to 0.5 bar (7 psi). The filter remains on-line and the filtration process is uninterrupted during the brief cleaning process. The flush discharge is among the lowest available resulting in minimal waste.

The V-Series filters are available ASME certified and are manufactured in an ASME certified facility. The filters come in a broad range of materials, pressure and temperature ratings. Evoqua manufactures filters and skids to simplify installation and meet specific requirements.

Specifications

Materials

- Filter Body: 10" - 12" - 14" inlet/outlet 316L SS **
- Screens: 316L SS sintered **
- Flanges: AWWA Class D **
- Seals: Nitrile, Viton®, silicone **

Filtration Range

- 10 to 1500 micron

Flow Range

- 27 to 732 m³/hr (120 to 3,222 gpm) per filter *

Maximum Pressure

- 10 bar (150 psi) **

Minimum Pressure

- 2 bar (30 psi) **

Maximum Temperature

- 80° C (176° F) **

Flush Cycle

- 12 to 15 seconds

Controller


- MicroFlush™ control system - up to four filters **

* Varies depending on micron level

** Other options available upon request

+Patented in some countries

V-SERIES™ FILTER DIMENSIONS

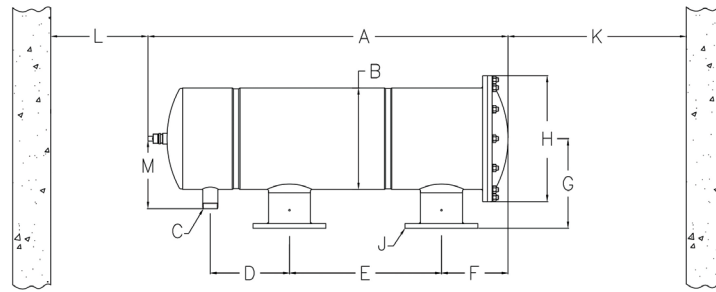

MODEL	DIMENSIONS (CM)								DIMENSIONS (MM)				DIMENSIONS (CM)		SCREEN AREA CM ²	NOMINAL FLOW (M ³ /HR)			FLUSH FLOW LITERS
	A	B	C	D	E	F	G	H	J	K	L	M	MICRON						
	FLG												100	200	300				
V-250-3	97.6	25.7	3.8	25.4	29.2	22.9	23.5	34.3	80	88.9	30.5	18.2	1445	63	84	92	30		
V-250-4	97.6	25.7	3.8	25.4	29.2	22.9	23.5	34.3	100	88.9	30.5	18.2	1445	63	84	92	30		
V-500-4	123.3	25.7	3.8	25.4	54.6	22.9	23.5	34.3	100	114.3	30.5	18.2	2890	125	168	184	57		
V-500-6	128.4	25.7	3.8	27.9	54.6	25.4	27.8	34.3	150	114.3	30.5	18.2	2890	125	168	184	57		
V-1000-6	164.6	38.6	5.1	40.2	61.0	35.2	34.3	47.8	150	152.4	30.5	26.9	5594	242	325	356	57		
V-1000-8	164.6	38.6	5.1	40.2	61.0	35.2	34.3	47.8	200	152.4	30.5	26.9	5594	242	325	356	57		
V-1500-8	195.1	38.6	5.1	40.2	91.4	35.2	34.3	47.8	200	178.0	30.5	26.9	8387	363	487	534	87		
V-1500-10	195.1	38.6	5.1	40.2	91.4	35.2	34.3	47.8	250	178.0	30.5	26.9	8387	363	487	534	87		
V-2000H-X	208.8	51.7	5.1	45.7	91.4	44.2	43.2	69.9	250 - 300 - 350	178.0	30.5	32.9	10942	474	636	697	87		
V-3500-X	317.5	61.0	7.6	93.3	127.0	55.3	51.1	81.3	350 - 400 - 500	269.3	30.5	41.7	19742	855	1147	1258	167		

MODEL	DIMENSIONS (IN)											SCREEN AREA IN ²	NOMINAL FLOW (GPM)			FLUSH FLOW GAL	
	A	B	C	D	E	F	G	H	J	K	L		M	MICRON			
	FLG												100	200	300		
V-250-3	38.4	10.1	1.5 NPT	10.0	11.5	9.0	9.2	13.5	3	35.0	12.0	7.2	224	276	370	405	8
V-250-4	38.4	10.1	1.5 NPT	10.0	11.5	9.0	9.2	13.5	4	35.0	12.0	7.2	224	276	370	405	8
V-500-4	48.5	10.1	1.5 NPT	10.0	21.5	9.0	9.2	13.5	4	45.0	12.0	7.2	448	551	739	811	15
V-500-6	50.5	10.1	1.5 NPT	11.0	21.5	10.0	11.0	13.5	6	45.0	12.0	7.2	448	551	739	811	15
V-1000-6	64.8	15.2	2 NPT	15.8	24.0	13.9	13.5	18.8	6	60.0	12.0	10.6	867	1066	1431	1569	15
V-1000-8	64.8	15.2	2 NPT	15.8	24.0	13.9	13.5	18.8	8	60.0	12.0	10.6	867	1066	1431	1569	15
V-1500-8	76.8	15.2	2 NPT	15.8	36.0	13.9	13.5	18.8	8	70.0	12.0	10.6	1300	1599	2145	2353	23
V-1500-10	76.8	15.2	2 NPT	15.8	36.0	13.9	13.5	18.8	10	70.0	12.0	10.6	1300	1599	2145	2353	23
V-2000H-X	82.2	20.3	2 NPT	18.0	36.0	17.4	17.0	27.5	10 - 12 - 14	70.0	12.0	12.9	1696	2086	2798	3070	23
V-3500-X	125.0	24.0	3 FLG	36.7	50.0	21.8	20.1	32.0	14 - 16 - 20	106.0	12.0	16.4	3060	3764	5049	5539	44

NOTES:

Nominal flow rates shown are the maximum flow rate for that model with 100, 200, and 300 micron screens for demonstration purposes only. Larger micron ratings result in higher allowable flow rates. Smaller micron ratings result in lower allowable flow rates.

Flush flow volume shown for each model is the volume of water used for that model when the pressure available to the filter is 2.4 bar (35 psi) during a 15 second flush cycle.

